



US009524470B1

(12) **United States Patent**  
**Chow et al.**

(10) **Patent No.:** **US 9,524,470 B1**  
(45) **Date of Patent:** **Dec. 20, 2016**

(54) **MODULAR ARRAY OF VERTICALLY  
INTEGRATED SUPERCONDUCTING QUBIT  
DEVICES FOR SCALABLE QUANTUM  
COMPUTING**

USPC ..... 438/2; 257/31, 36  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,932,514 B2	4/2011	Farinelli et al.	
8,455,278 B2 *	6/2013	Linares .....	B82Y 10/00 216/2
8,642,998 B2	2/2014	Gambetta et al.	
8,659,007 B2	2/2014	Bonderson et al.	
8,872,360 B2	10/2014	Chow et al.	
9,219,298 B2 *	12/2015	Abraham .....	H01P 7/086
2004/0016918 A1 *	1/2004	Amin .....	B82Y 10/00 257/14
2014/0097405 A1	4/2014	Bunyk	
2014/0235450 A1	8/2014	Chow et al.	

OTHER PUBLICATIONS

Chow, Jerry M., et al.; "Modular Array of Vertically Integrated Superconducting Qubit Devices for Scalable Quantum Computing"; U.S. Appl. No. 15/175,454, filed Jun. 7, 2016.

(Continued)

Primary Examiner — Hung Vu

(74) *Attorney, Agent, or Firm* — Cantor Colburn LLP;  
Vazken Alexanian

(57) **ABSTRACT**

A technique relates to an assembly for a quantum computing device. A quantum bus plane includes a first set of recesses. A readout plane includes a second set of recesses. A block is positioned to hold the readout plane opposite the quantum bus plane, such that the first set of recesses opposes the second set of recesses. A plurality of qubit chips are included where each has a first end positioned in the first set of recesses and has a second end positioned in the second set of recesses.

**10 Claims, 12 Drawing Sheets**

(71) Applicant: **International Business Machines Corporation**, Armonk, NY (US)

(72) Inventors: **Jerry M. Chow**, White Plains, NY (US); **Jay M. Gambetta**, Yorktown Heights, NY (US); **Mary B. Rothwell**, Ridgefield, CT (US); **James R. Rozen**, Peekskill, NY (US)

(73) Assignee: **INTERNATIONAL BUSINESS MACHINES CORPORATION**, Armonk, NY (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.


(21) Appl. No.: **14/737,707**

(22) Filed: **Jun. 12, 2015**

(51) **Int. Cl.**  
**H01L 29/02** (2006.01)  
**G06N 99/00** (2010.01)  
**H01L 39/22** (2006.01)  
**H01L 39/04** (2006.01)  
**H01L 25/04** (2014.01)  
**H01L 39/24** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **G06N 99/002** (2013.01); **H01L 25/04** (2013.01); **H01L 39/045** (2013.01); **H01L 39/223** (2013.01); **H01L 39/2493** (2013.01)

(58) **Field of Classification Search**  
CPC ..... H01L 25/04; H01L 39/025; H01L 39/045; H01L 39/223; H01L 39/2493; H01L 29/158; H01L 49/006; G06N 99/002

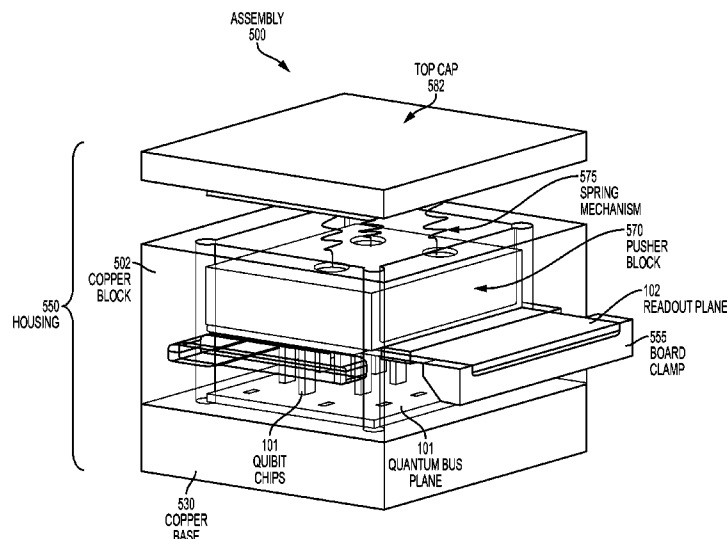

(56)

**References Cited**

## OTHER PUBLICATIONS

List of IBM Patents or Patent Applications Treated as Related—  
Date Filed: Jun. 7, 2016; 1 page.

C. Rigetti et al., “Fully Microwave-Tunable Universal Gates in Superconducting Qubits with Linear Couplings and Fixed Transition Frequencies,” *Physical Review B*, vol. 81, 2010, 134507, 7 pages.

H. Paik et al., “Observation of high coherence in Josephson junction qubits measured in a three-dimensional circuit QED architecture,” *Physical Review Letters*, vol. 107, No. 24, 2011, 240501, 5 pages.

J. Chow et al., “Implementing a strand of a scalable fault-tolerant quantum computing fabric,” *Nature Communications*, vol. 5, 2014, 4015, 9 pages.

M. Goryachev et al., “The 3D split-ring cavity lattice: a new metastructure for engineering arrays of coupled microwave harmonic oscillators,” *New Journal of Physics*, vol. 17, No. 2, 2015, 023003, 11 pages.

\* cited by examiner

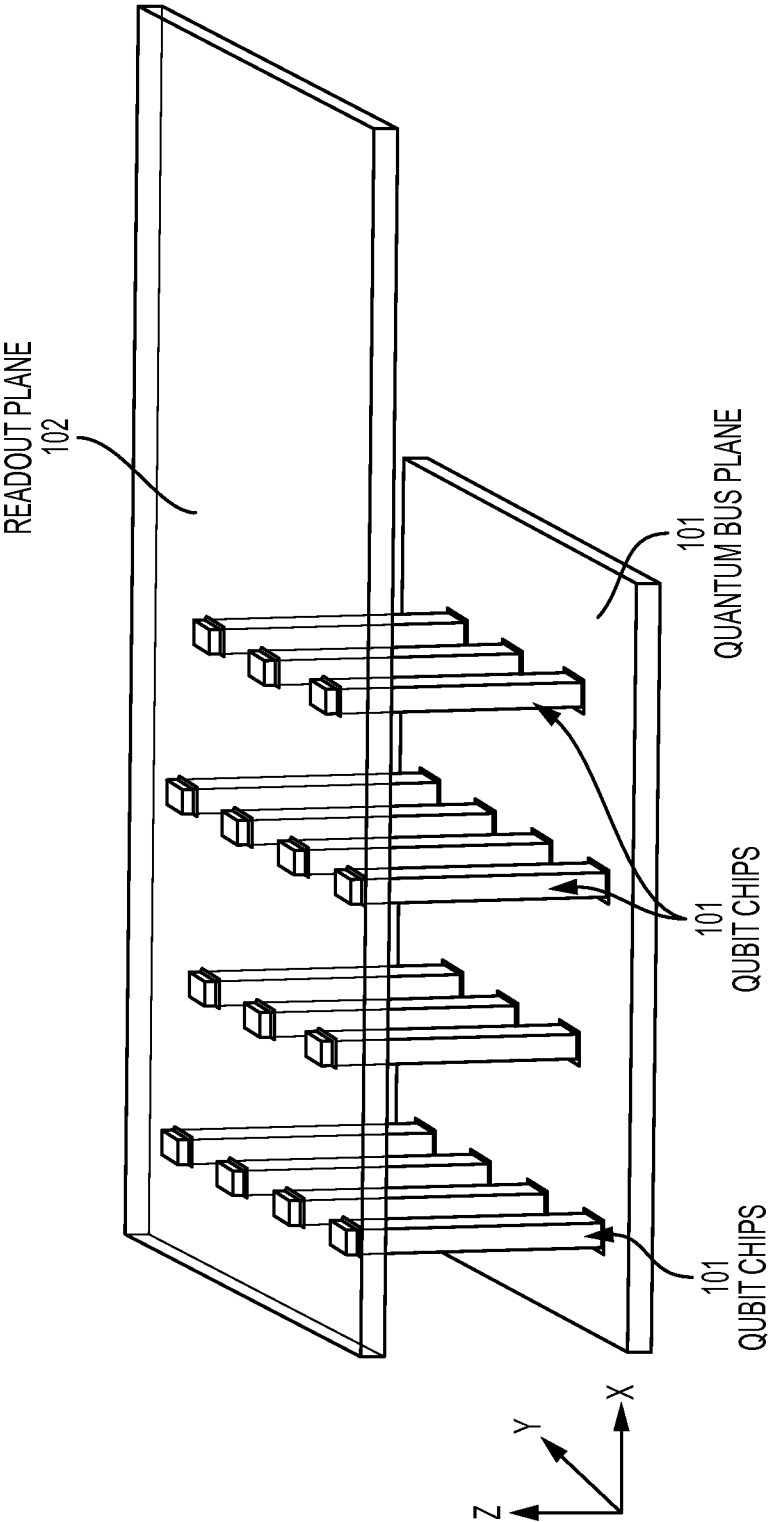


FIG. 1

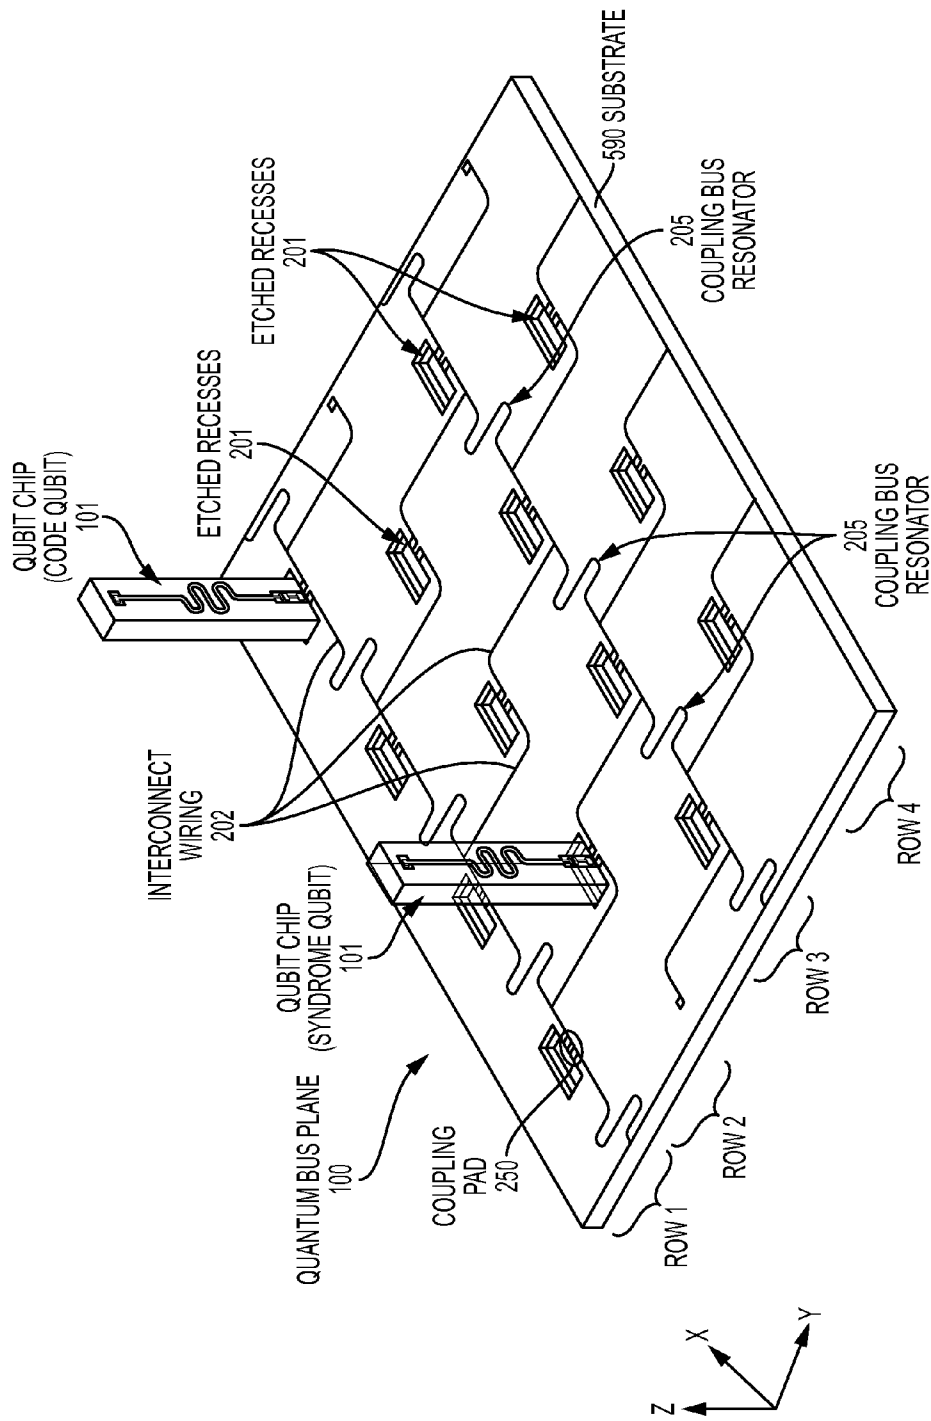
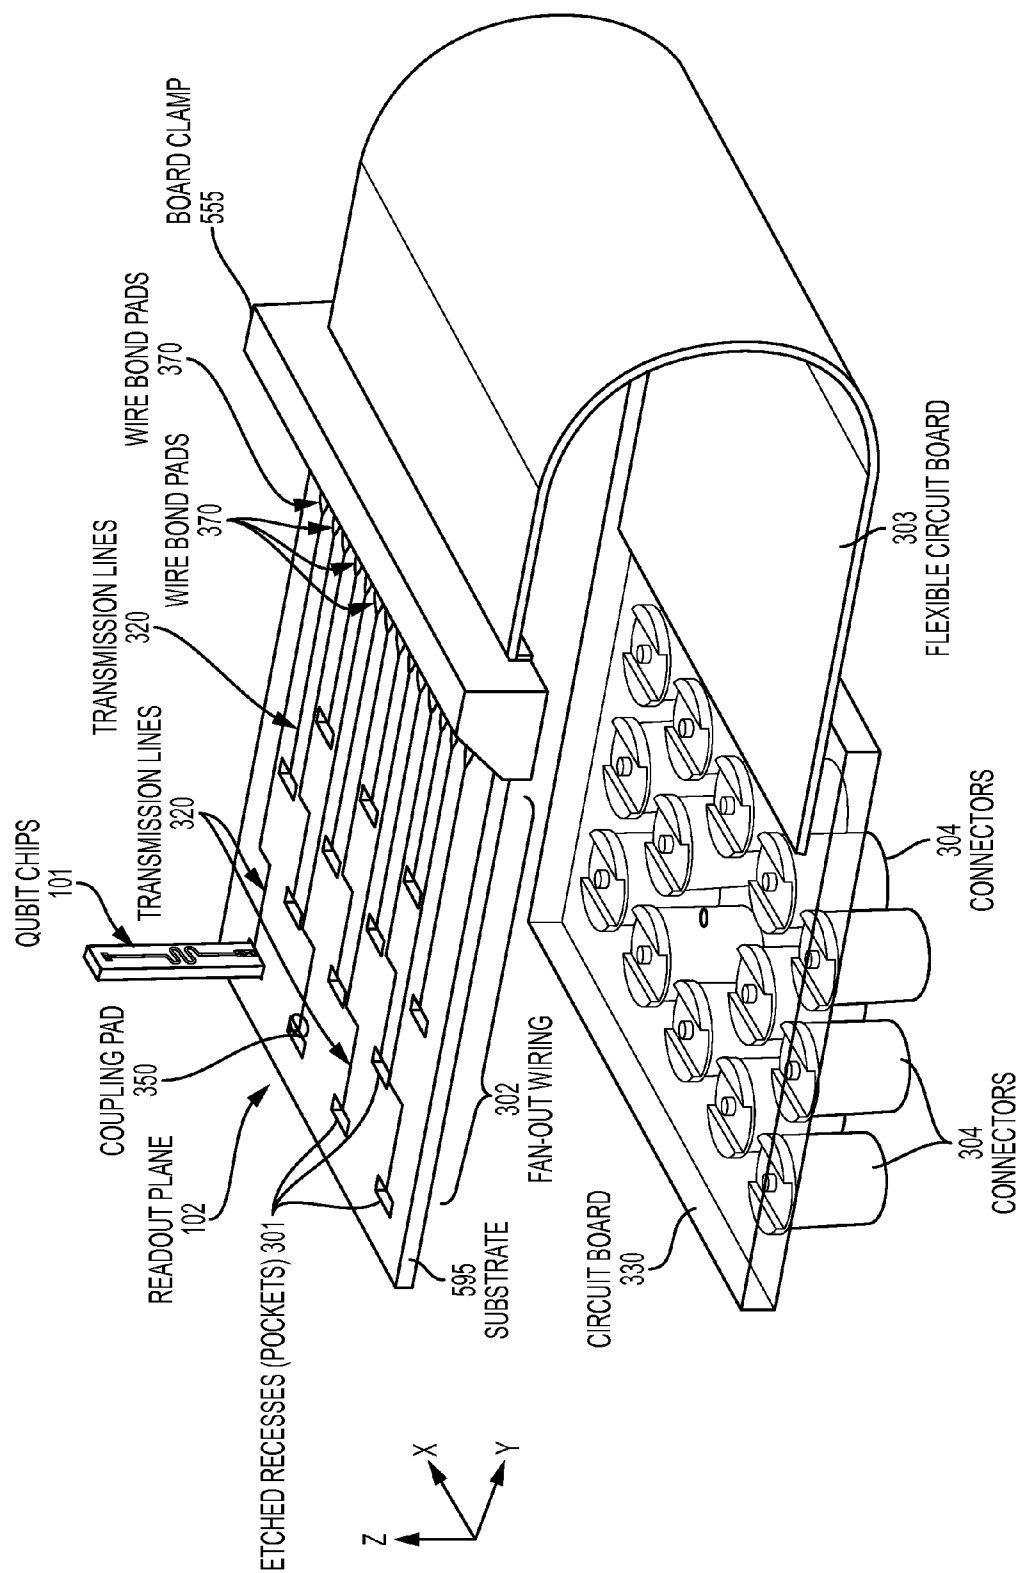


FIG. 2



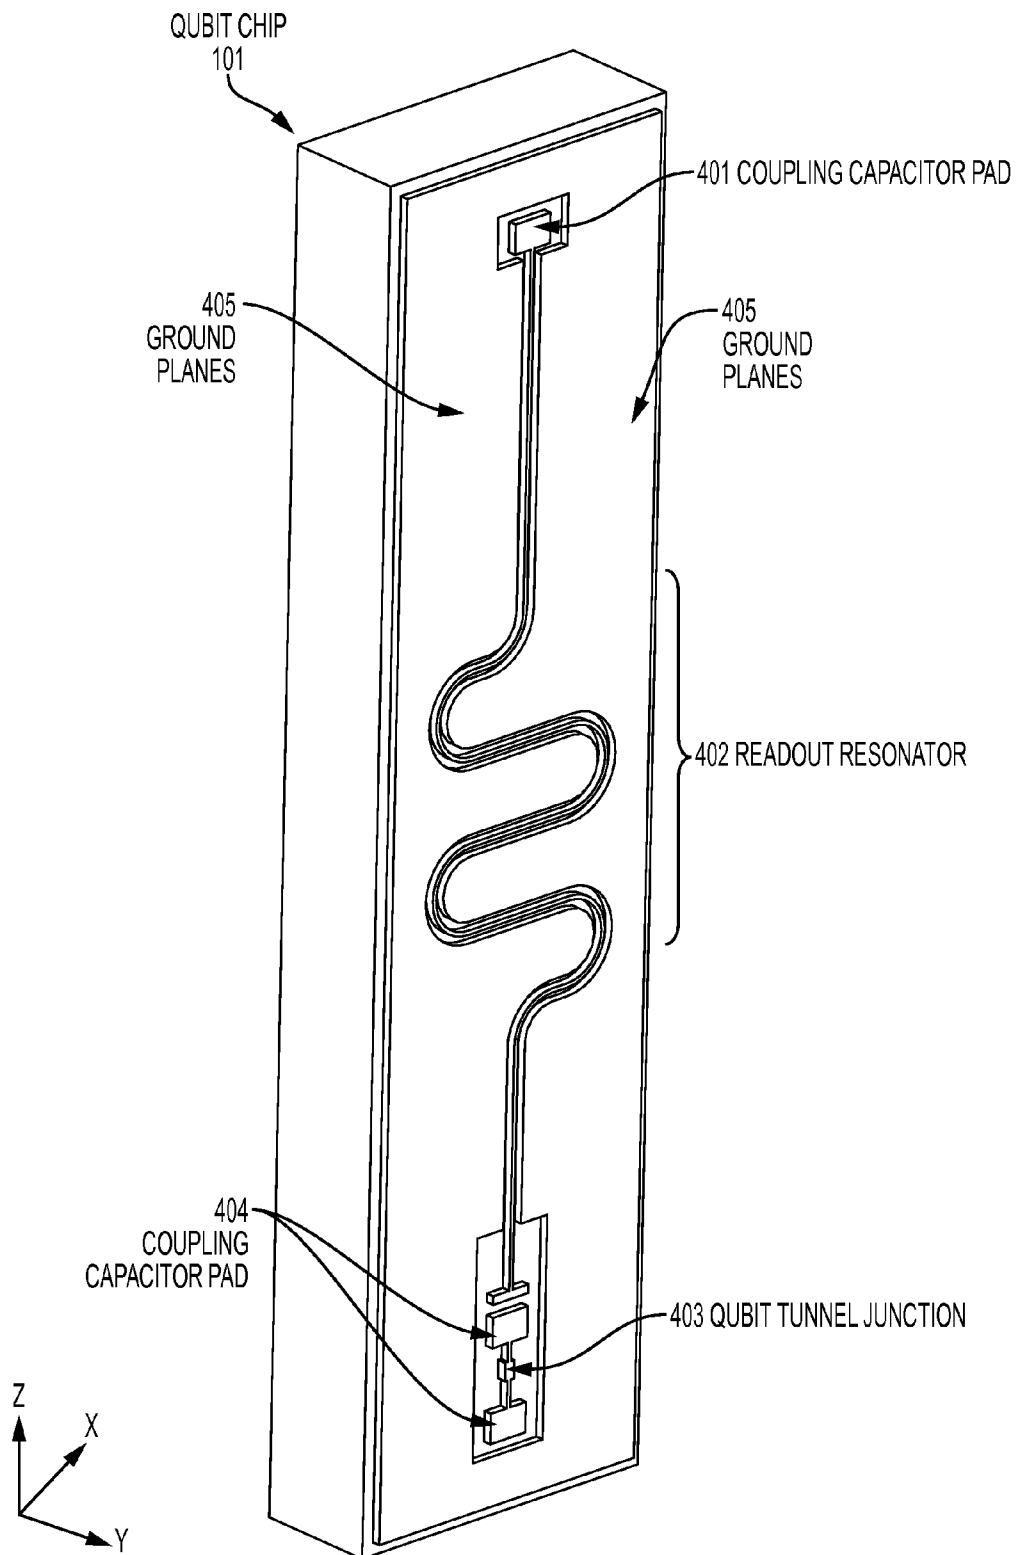


FIG. 4

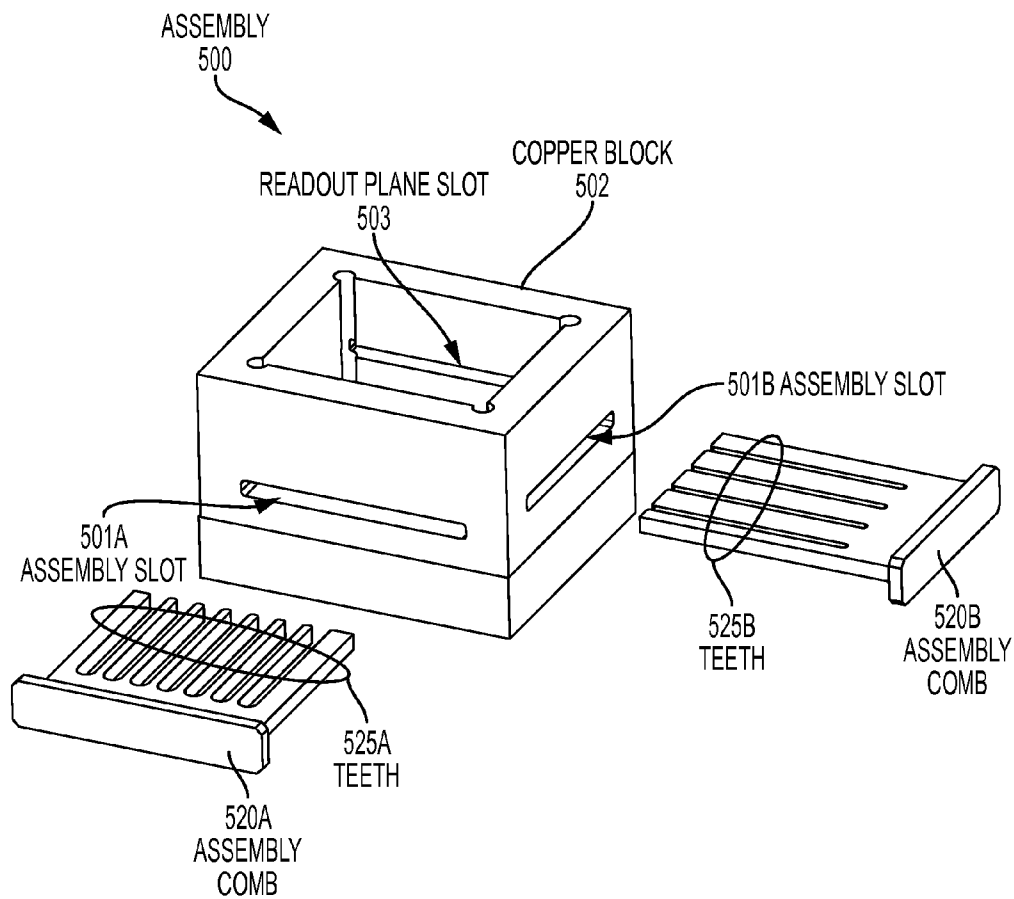


FIG. 5A

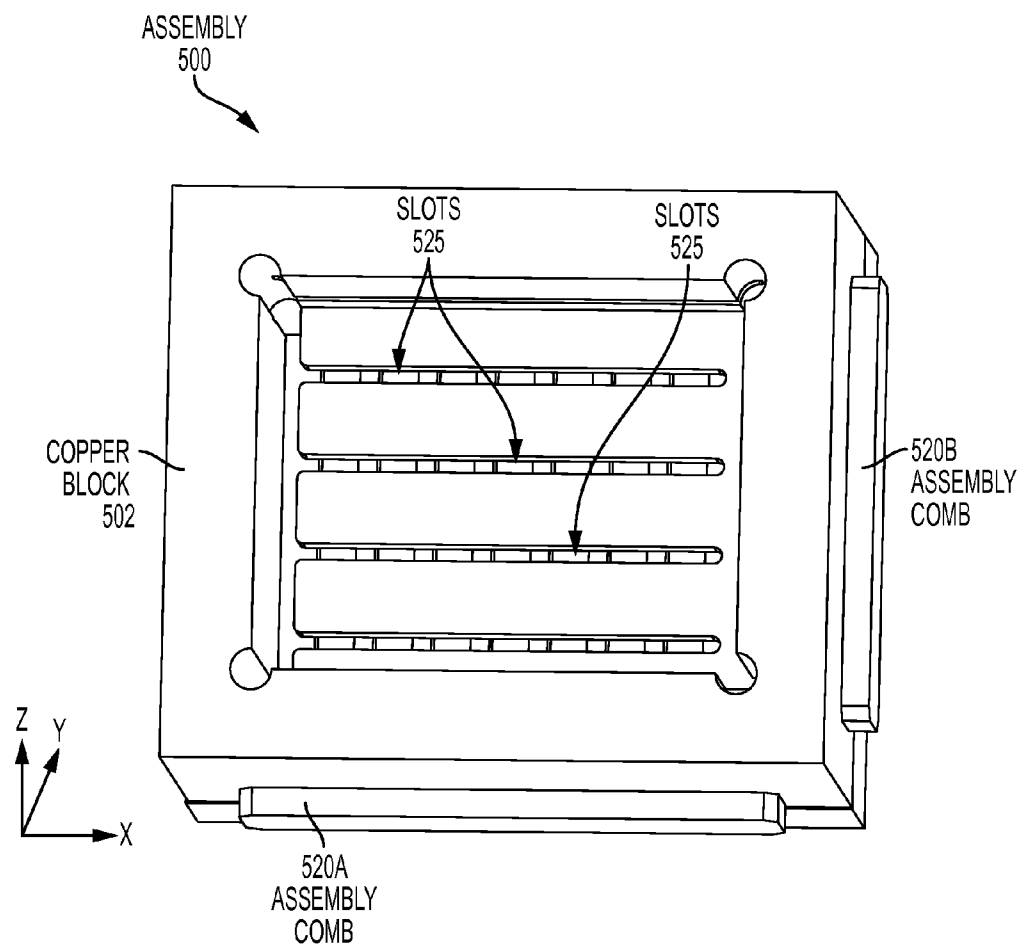


FIG. 5B



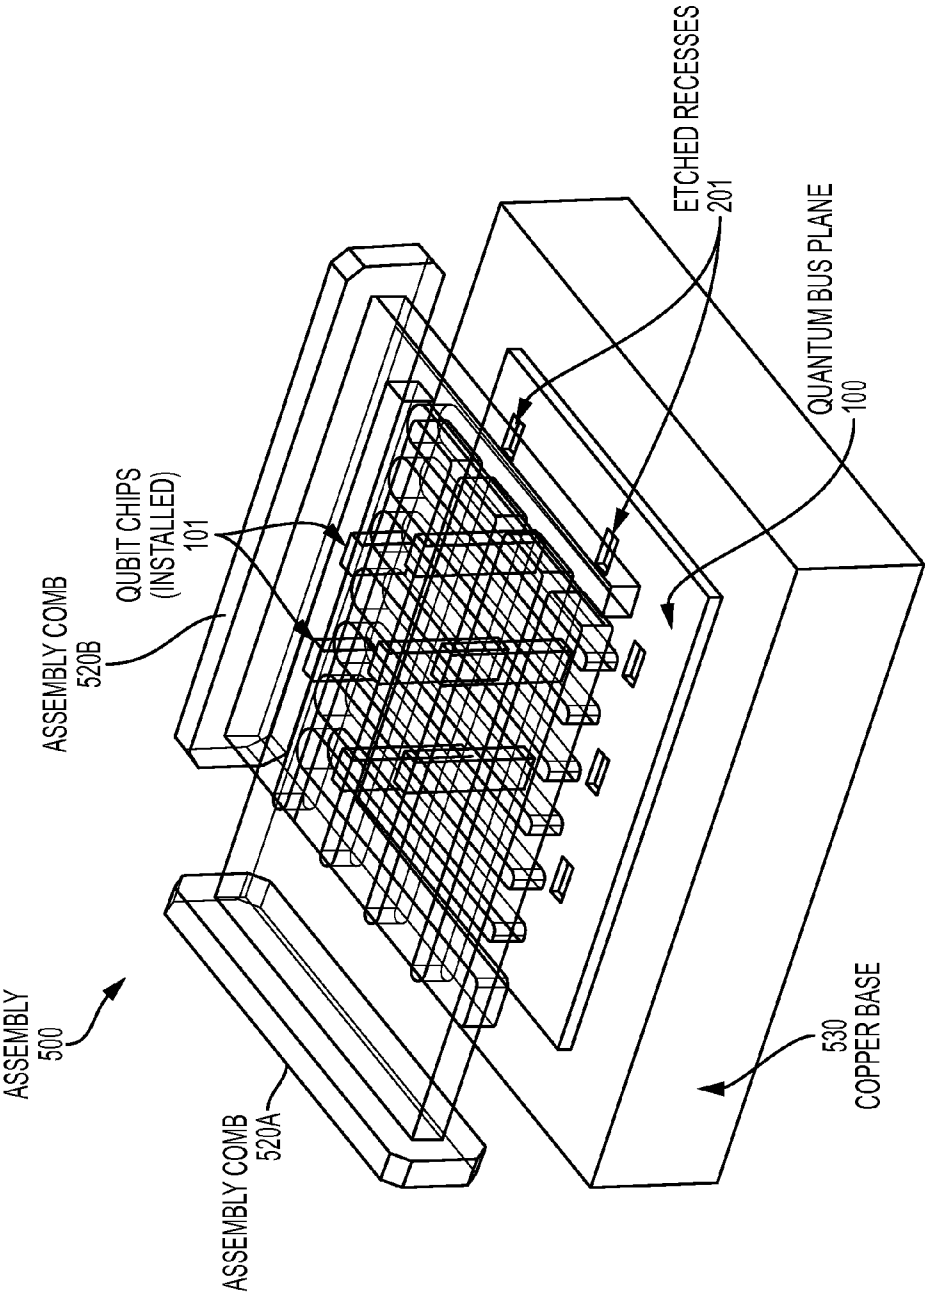
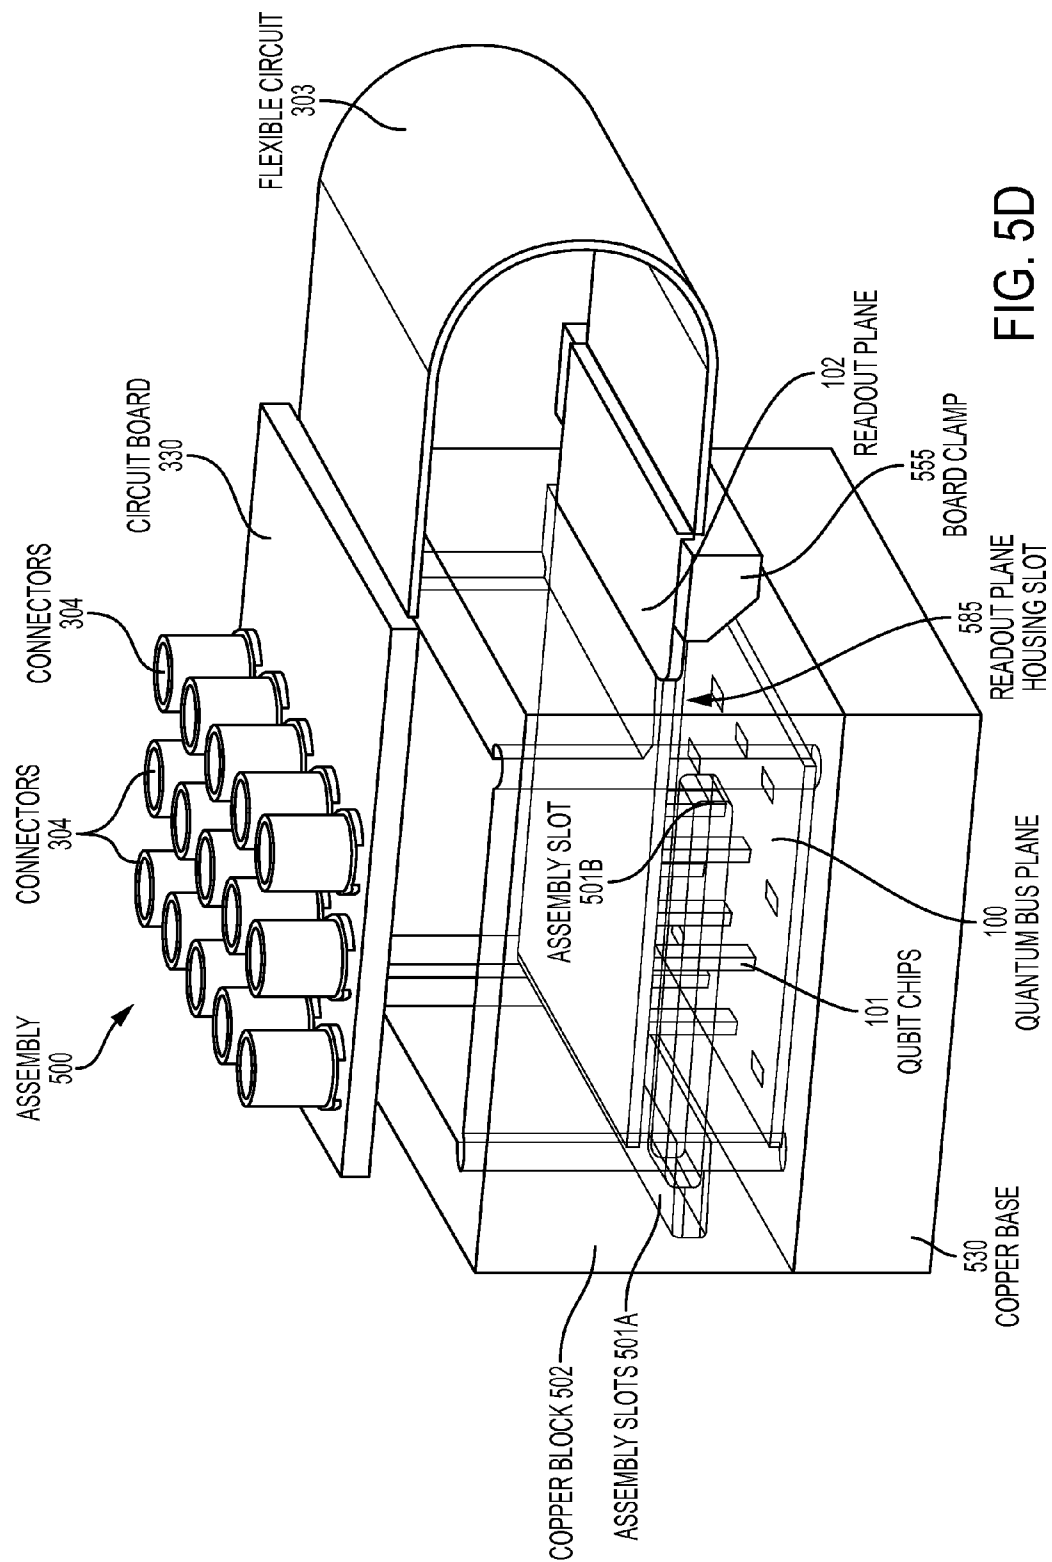


FIG. 5C



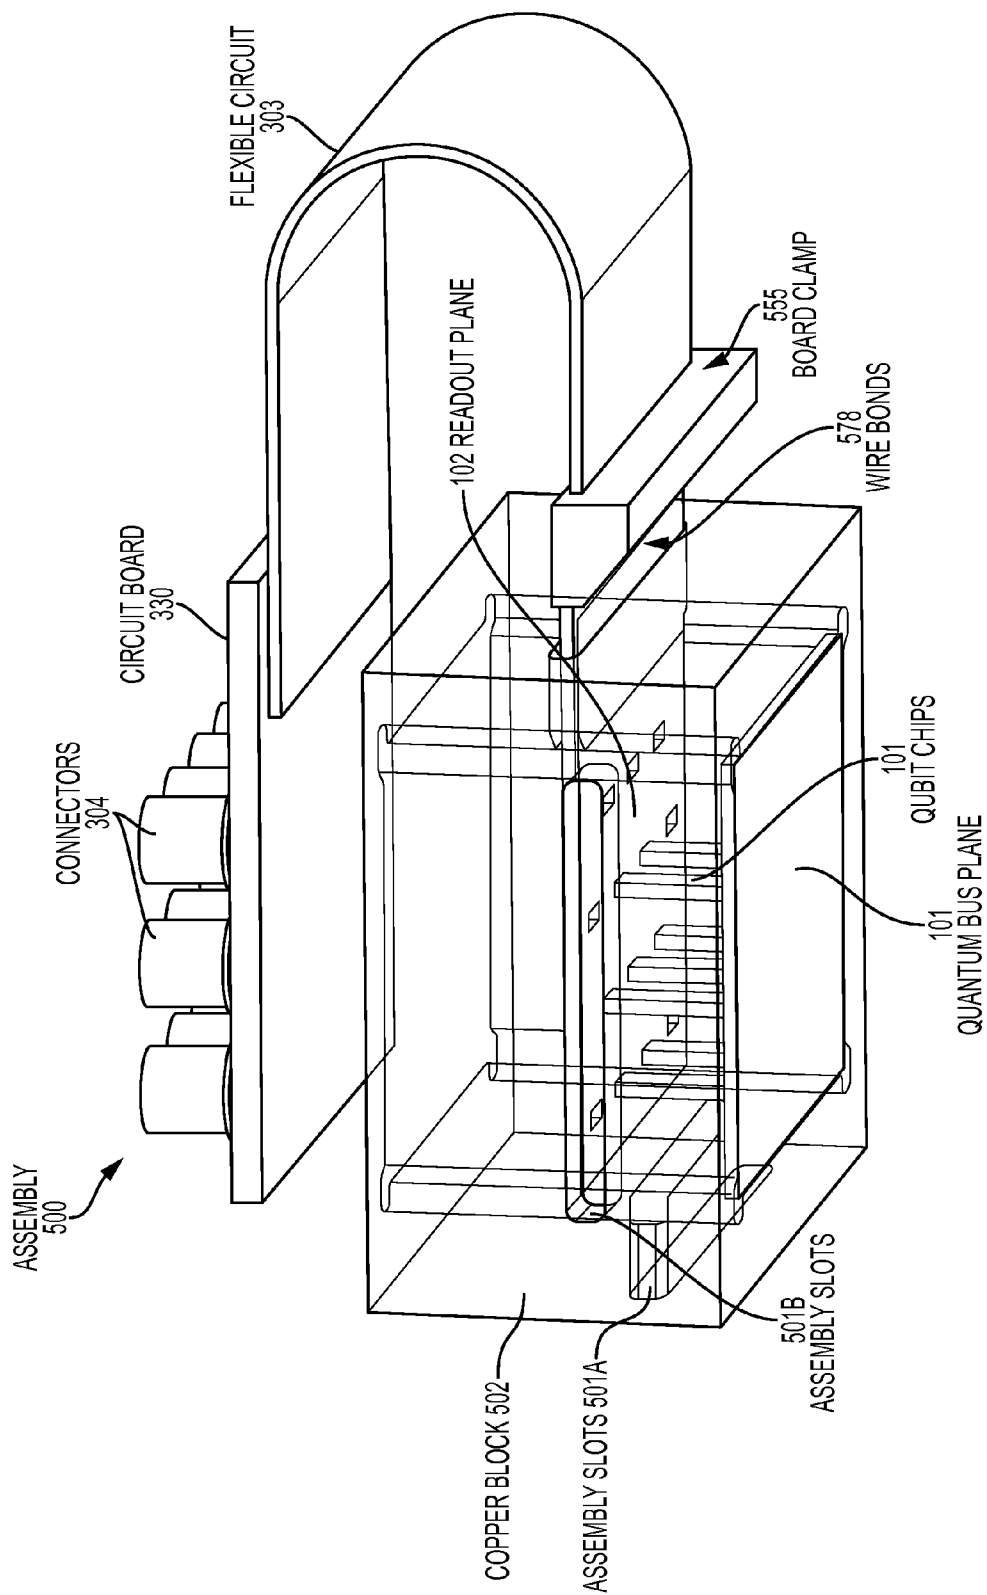


FIG. 5E

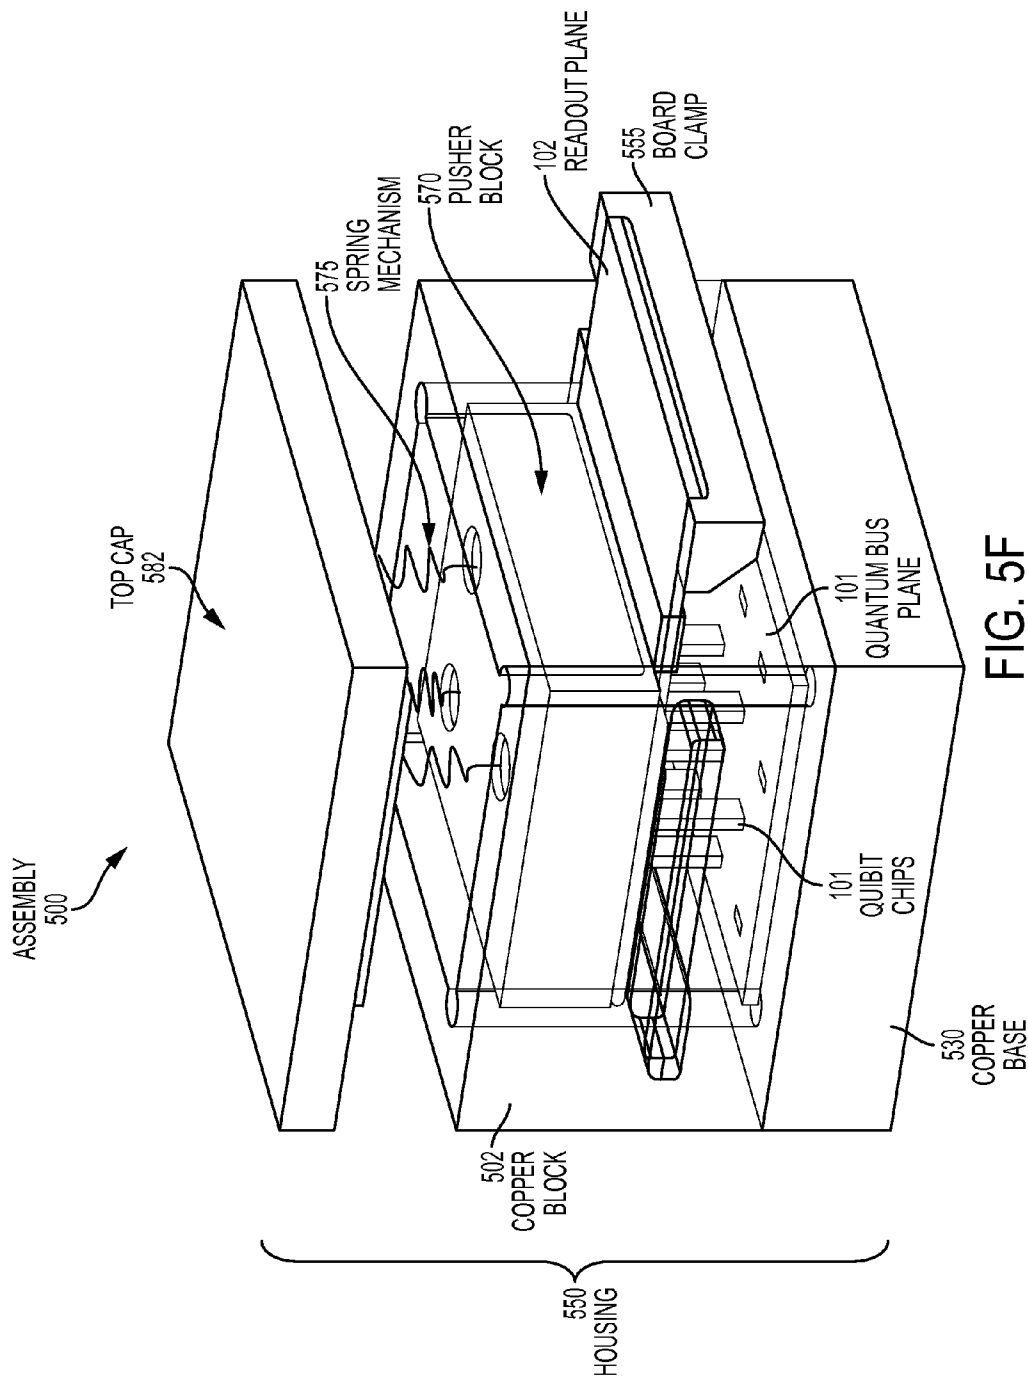


FIG. 5F

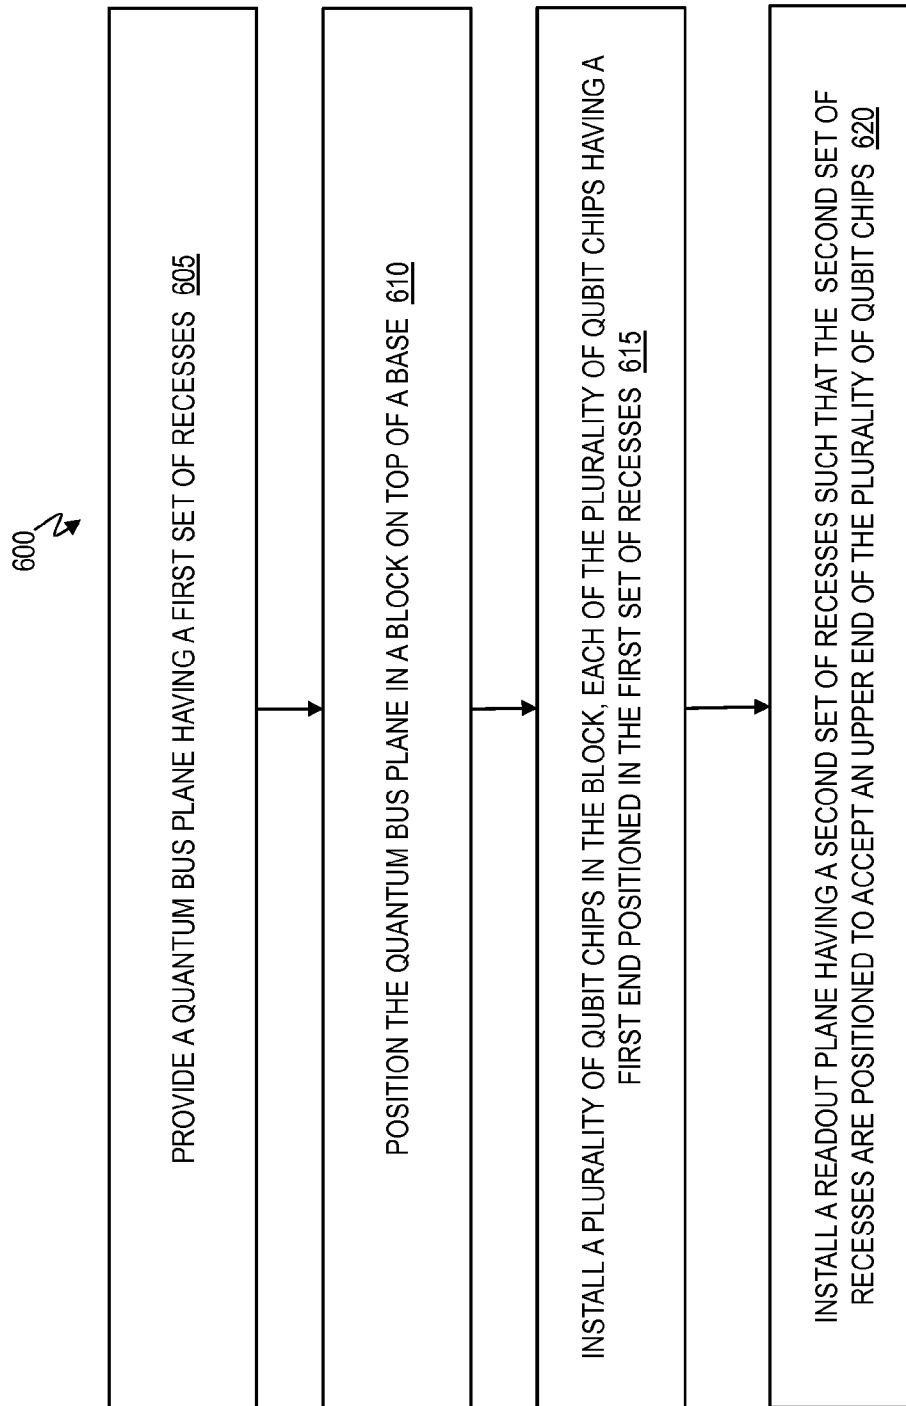


FIG. 6

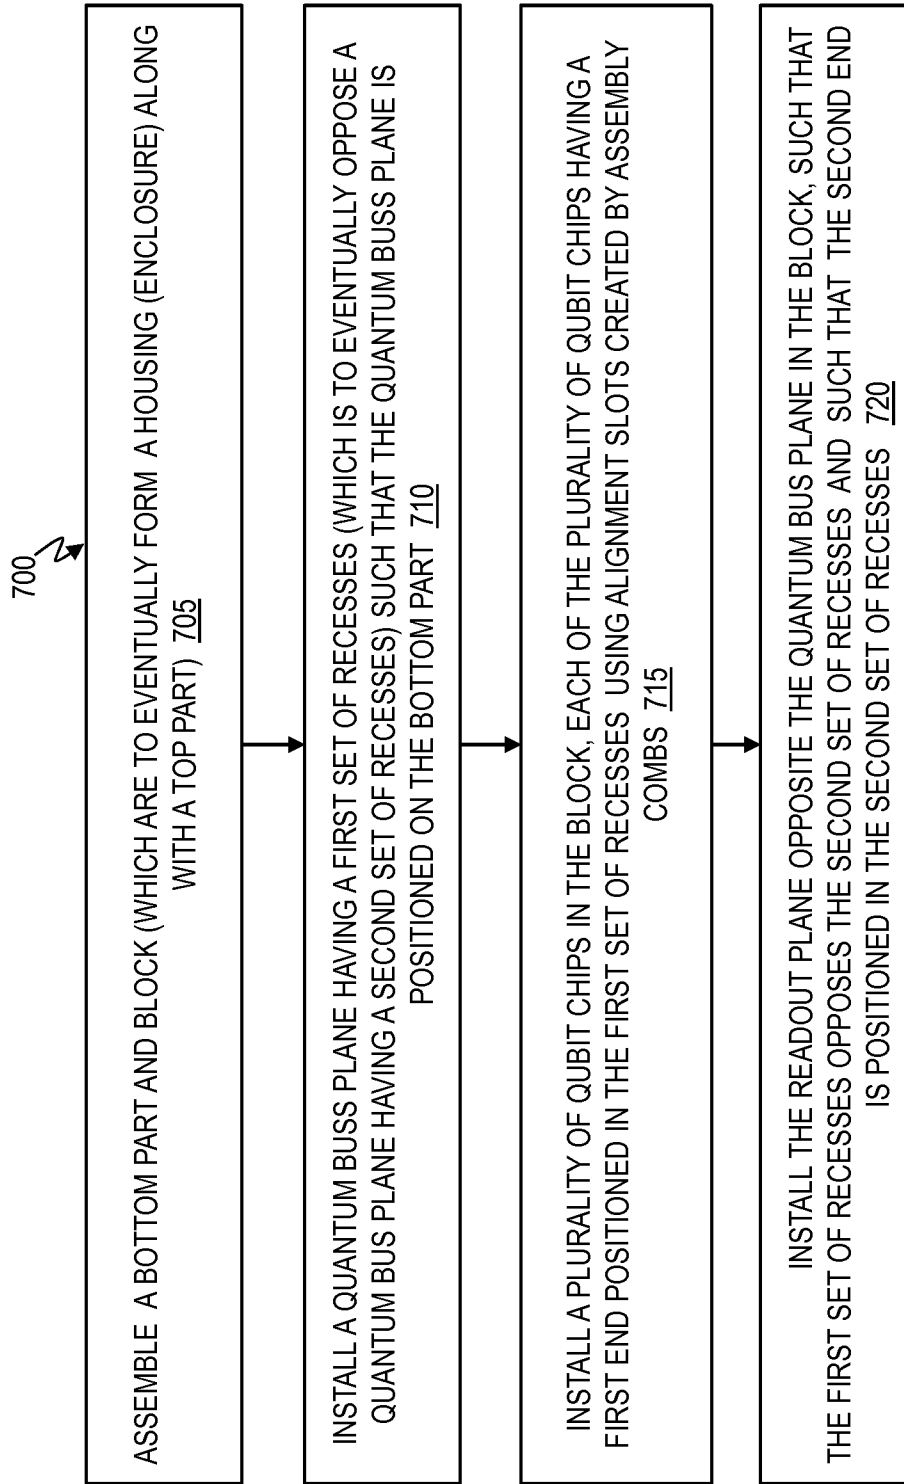


FIG. 7

1

# MODULAR ARRAY OF VERTICALLY INTEGRATED SUPERCONDUCTING QUBIT DEVICES FOR SCALABLE QUANTUM COMPUTING

## BACKGROUND

The present invention relates to quantum computing, and more specifically, to a modular array of vertically integrated superconducting qubit devices for scalable quantum computing.

In one approach called circuit quantum electrodynamics, quantum computing employs active superconducting devices called qubits to manipulate and store quantum information, and resonators (e.g., as a two-dimensional (2D) planar waveguide or as a three-dimensional (3D) microwave cavity) to read out and facilitate interaction among qubits. Each superconducting qubit comprises one or more Josephson junctions shunted by capacitors in parallel with the junctions. The qubits are capacitively coupled to 2D or 3D microwave cavities. The energy associated with the qubit resides in the electromagnetic fields around the Josephson junction and especially in the vicinity of relatively larger shunt capacitance structures. To date, a major focus has been on improving lifetimes of the qubits in order to allow calculations (i.e., manipulation and readout) to take place before the information is lost to decoherence of the qubits. Currently, superconducting qubit coherence times can be as high as 100 microseconds, and efforts are being made to increase the coherence times. One area of research with respect to increasing coherence times is focused on eliminating lossy materials from areas of relatively high electromagnetic field energy density such as in the vicinity of sharp corners and edges of the thin films of which the qubits are comprised. Such materials in proximity to the qubit can include imperfections that support defects known as two-level systems (TLSs).

## SUMMARY

According to one embodiment, an assembly for a quantum computing device is provided. The assembly includes a quantum bus plane including a first set of recesses, a readout plane including a second set of recesses, and a block positioned to hold the readout plane opposite the quantum bus plane, such that the first set of recesses opposes the second set of recesses. Also, the assembly includes a plurality of qubit chips where each has a first end positioned in the first set of recesses and has a second end positioned in the second set of recesses.

According to one embodiment, an assembly for a quantum computing device is provided. The assembly includes a housing configured as an enclosure having a bottom part, a top part, and a block, in which the block connects the top and bottom parts. The assembly includes a quantum bus plane including a first set of recesses, and a readout plane including a second set of recesses. The block is configured to position the readout plane opposite the quantum bus plane, such that the first set of recesses opposes the second set of recesses. Also, the assembly includes a plurality of qubit chips where each has a first end positioned in the first set of recesses and has a second end positioned in the second set of recesses.

According to one embodiment, a method of configuring an assembly for a quantum computing device is provided. The method includes providing a housing configured as an enclosure having a bottom part, a top part, and a block, in

2

which the block connects the top and bottom parts. The method includes providing a readout plane having a first set of recesses and a quantum bus plane having a second set of recesses, and assembling the readout plane opposite the quantum bus plane in a block, such that the first set of recesses opposes the second set of recesses. Also, the method includes installing a plurality of qubit chips in the block, where each of the plurality of qubit chips has a first end positioned in the first set of recesses and has a second end positioned in the second set of recesses.

In one or more embodiments, the plurality of qubit chips extends vertically in a lengthwise direction by being positioned in both the first set of recesses and the second set of recesses. The first set of recesses holds the first end of the plurality of qubit chips in the readout plane, and the second set of recesses holds the second end of the plurality of qubit chips in the quantum bus plane.

In one or more embodiments, the first end of the plurality of qubit chips is opposite the second end. In one or more embodiments, the block is made of a superconducting material.

In one or more embodiments, the quantum bus plane comprises a substrate with interconnect wiring on top of the substrate, and the interconnect wiring connects the plurality of qubit chips via a plurality of coupling bus resonators.

In one or more embodiments, the readout plane comprises a substrate with fan-out wiring on top of the substrate, and the fan-out wiring individually connects each of the plurality of qubit chips to a circuit board. The circuit board individually connects each of the plurality of qubit chips to a plurality of connectors in a one-to-one relationship.

In one or more embodiments, the block is configured to receive a first assembly comb and a second assembly comb to form an intersection, and the intersection of the first and second assembly combs forms a plurality of slots for individually accepting the plurality of qubit chips. The plurality of slots mechanically holds the plurality of qubit chips in a vertical position.

Additional features and advantages are realized through the techniques of the present invention. Other embodiments and aspects of the invention are described in detail herein and are considered a part of the claimed invention. For a better understanding of the invention with the advantages and the features, refer to the description and to the drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other features, and advantages of the invention are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic illustrating a transparent view of part of the modular array of vertically integrated superconducting qubit chips according to an embodiment;

FIG. 2 is a schematic illustrating a quantum bus plane design according to an embodiment;

FIG. 3 is a schematic illustrating the readout plane in an inverted view according to an embodiment;

FIG. 4 is a schematic of an example qubit chip according to an embodiment.

FIGS. 5A through 5F illustrate an assembly and packaging technique for the modular array of vertically integrated superconducting qubit chips according to an embodiment, in which:

FIG. 5A is a schematic of an assembly illustrating assembly combs for a block;

FIG. 5B is a schematic of the assembly illustrating the assembly combs in place to form slots for orienting the superconducting qubit chips;

FIG. 5C is a schematic of the assembly illustrating the installation of the superconducting qubit chips in the slots formed by the assembly combs;

FIG. 5D is a schematic of the assembly illustrating installation of the readout plane in the block;

FIG. 5E is a schematic of the assembly illustrating a view underneath the block;

FIG. 5F is a schematic of the assembly illustrating that a pusher block applies pressure to hold the superconducting qubit chips in place;

FIG. 6 is a method of configuring an assembly according to an embodiment; and

FIG. 7 is a method of configuring an assembly according to an embodiment.

### DETAILED DESCRIPTION

Superconducting Josephson-junction based qubits are promising candidates for fault-tolerant quantum computing. As a solid-state technology, it has always held the potential of simpler scalability via existing integration techniques. Superconducting circuit and device fabrication can leverage well-known lithographic methods which can lead to quantum integrated processors with a high density of qubits. Furthermore, superconducting qubits operate in the microwave frequency regime, allowing for all-electrical control of the qubits and other elements which might be in the system. The other elements may include microwave resonators, active filters, quantum-limited amplifiers, etc.

A state-of-the-art fault-tolerant quantum computing architecture which has gathered interest recently is the surface code. In the surface code, qubits are arranged in a lattice with only the nearest neighbor interactions required. For superconducting qubits, the surface code is an attractive path forward as defining multiple qubits in a nearest-neighbor lattice. Moreover, the error thresholds which are required for the surface code are within reach for superconducting qubits with the current levels of coherence. One particular physical proposal in the state-of-the-art for realizing the surface code with superconducting qubits is the skew-symmetric layout. In this lattice, each superconducting qubit is coupled to two separate linking bus resonators. The coupling of superconducting qubits with microwave resonators is known as circuit quantum electrodynamics (cQED). The microwave resonators are typically defined as planar stripline resonators but can also be modes within three-dimensional (3D) waveguide cavities.

Although it may appear simple to design a large lattice of many superconducting qubits and stripline resonators lithographically, getting every resonator mode and every qubit to work as desired together is a challenge. For example, crosstalk between resonators and superconducting qubits as well as undesired spurious modes can result in stray couplings between quantum objects. Crosstalk is defined here as any unwanted coupling of microwave signals between qubit or resonator channels, other than those desired and defined by wiring. Furthermore, although it may appear easy to optimize parameters for a single qubit and a single cavity mode, once these individual qubits are re-arranged in a larger network and all defined on the same chip, their (collective) behavior can change and can be difficult to then debug.

According to embodiments discussed herein, a vertically integrated multi-chip architecture is provided, with discrete superconducting chip pieces comprised of superconducting qubits and their readout resonators. The superconducting qubits, along with their readout resonators, are then all arranged to mate in a matrix sandwiched by two larger carrier chips. These two larger carrier chips serve two purposes: one purpose is to integrate multiple resonator quantum buses to couple the superconducting qubits together (thereby coupling quantum information between qubits), and the other purpose permits physical connections via fan-out wiring to explicit microwave controls. This embodiment realizes a scalable architecture for quantum computation using well-established technology, while obviating challenging silicon integration techniques, such as thru-silicon-vias (TSVs) and multi-level lithography.

There are two physically different methods for implementing superconducting quantum processors via the circuit quantum electrodynamics (cQED) architecture, which are a 2D planar lithographic method and a 3D waveguide cavity method. The quantum processor refers to the entirety of the assembled components.

2D Planar Integration: The integration of qubits and resonators for 2D cQED is started via depositing superconducting films on silicon or sapphire substrates. Some typical superconducting films used are niobium (Nb), aluminum (Al), titanium nitride (TiN), and niobium nitride (NbN). Resonators (including readout resonators) are commonly defined in these superconducting films using coplanar waveguides, microstrips, coplanar striplines, or lumped element inductors and capacitors. Subsequently, superconducting qubits with Josephson junctions, such as the transmons, phase-qubits, or flux-qubits are also lithographically patterned via either electron-beam or optical lithography. Scaling up to larger quantum processors in this scheme requires a larger and larger chip to accommodate more resonators for coupling, more qubits, and more readout resonators. Using this 2D integration technique, processors up to 9 qubits have been devised in a linear chain, and 8 qubits in a latticed architecture. As the number of qubits in the 2D processor scales up, input-output (I/O) becomes increasingly challenging. In order to avoid crosstalk and integrate appropriate fan-out, technologies such as 3D integrated flip-chips, air-bridge crossovers, thru-silicon vias, and multi-layer lithography are required. As more and more of these different fabrication processes are required to scale up to larger quantum processors, the potential influence and degradation on the superconducting qubits increases rapidly. Therefore using these advanced fabrication techniques can lead to many different sources of decoherence in the qubits. For some of these processes, it could be necessary to perform them after Josephson junctions are lithographically defined. The impact and losses on Josephson junction based superconducting qubits after these processing steps are then a particular concern as to whether high coherence can continue to be preserved. Accordingly, this makes full-scale integration of a large system having a large number of qubits challenging.

Embodiments include various features:

- 1) An array of vertical superconducting qubit chips is mounted to a silicon quantum bus plane and mounted to a separate qubit addressing and readout plane.
- 2) A quantum bus (QB) plane lithographically is defined on silicon which permits the coupling of quantum information among individual vertical superconducting qubit chips.
- 3) A readout (RO) plane couples each superconducting qubit chip's readout resonator to an integrated microwave



bandwidth transmission line which follows onto a flexible circuit board thus connecting each superconducting qubit chip's readout resonator to a coaxial connector for input/output (I/O).

4) Vertical superconducting qubit chips each contain a single superconducting qubit (also referred to as a tunnel junction, such as a Josephson junction) and on-chip readout resonator, designed in a way to effectively couple to the quantum bus plane and the readout plane. Each individual vertical superconducting qubit chip is designed to have a specific lithographically-defined coupling capacitance between the tunnel junction to the quantum bus plane on one end and between the readout resonator and the addressing transmission line of the readout plane on the other end.

5) All silicon elements are retained within a well-thermalized metal housing (e.g., copper) which provides mechanical support, alignment, and thermal contact.

According to embodiments, the technique discussed herein is an approach for assembling the modular array of superconducting qubit chips into a scalable quantum processor, commensurate with latticed architectures for quantum error correction, such as the surface code.

Now turning to the figures, FIG. 1 is a schematic illustrating a transparent view of part of the modular array of vertically integrated superconducting qubit devices according to an embodiment. FIG. 1 shows a quantum bus plane 100, a readout plane 102, and superconducting vertical qubit chips 101. The superconducting vertical qubit chips 101 are also referred to as qubit dies, qubits, etc. The readout plane 102 and the quantum bus plane 100 sandwich the qubit chips 101 in between.

FIG. 2 is a schematic illustrating a quantum bus plane design of the quantum bus plane 100 according to an embodiment. The quantum bus plane design illustrates a surface code example. The quantum bus plane 100 may be made of a semiconductor material as the substrate, such as, e.g., silicon, sapphire, etc. The semiconductor material has interconnect wiring 202 deposited on top of the semiconductor material. The interconnect wiring 202 is made of a superconducting material.

Superconducting material may be defined as a material that can conduct electricity or transport electrons from one atom to another with no resistance when the superconducting material has reached "critical temperature" ( $T_c$ ), or the temperature at which the material becomes superconductive. Conducting electricity or transporting electrons from one atom to another with no resistance means that no heat, sound, or any other form of energy would be released from the material as understood by one skilled in the art.

The quantum bus plane 100 connects each individual qubit chip 101 via interconnect wiring 202. The interconnect wiring 202 connects (e.g., capacitively) to each superconducting qubit chip 101 installed in the quantum bus plane 100. The interconnect wiring 202 includes coupling bus resonators 205 positioned between each superconducting vertical qubit chip 101. Particularly, superconducting vertical qubit chips 101 are configured to couple together through the coupling bus resonators 205.

To assist with securing and positioning superconducting vertical qubit chips 101 on the quantum bus plane 100, the quantum bus plane 100 includes etched recesses 201 at the locations to insert each of the superconducting vertical qubit chips 101. The etched recesses 201 are pockets that individually fit the superconducting vertical qubit chips 101 into specific locations in the quantum bus plane 100. The etched recesses 201 in the quantum bus plane 100 help to define accurate capacitive coupling between the qubit chips 101

and the interconnect wiring 202. The etched recesses 201 determine how deeply the vertical qubit chips 101 sit into the quantum bus plane 100 and thus determine the vertical separation between the capacitor pads on the qubit chip 101 and those on the quantum bus plane 100. The etched recesses 201 are etched into the semiconductor substrate of the quantum bus plane 100. Accurate vertical separation of these coupling pads is a prerequisite for achieving a precise coupling capacitance value. The coupling capacitor pad 404 is shown in FIG. 4 and the quantum bus plane 100 has coupling pad 250 in front of each etched recess 201.

For the sake of clarity and so as not to obscure FIG. 2, only two superconducting vertical qubit chips 101 are shown in FIG. 2 although it is understood that each row, e.g., rows 1-4, are filled with superconducting vertical qubit chips 101. One superconducting vertical qubit chip 101 is shown as a code superconducting vertical qubit chip in row 1, and the other superconducting vertical qubit chip 101 is a syndrome superconducting vertical qubit chip in row 2. In one implementation, each row may be filled with the same type of superconducting vertical qubit chip 101. For example, row 1 may be filled with code superconducting vertical qubit chips 101, while row 2 is filled with syndrome superconducting vertical qubit chips 101. Row 3 may be filled with code superconducting vertical qubit chips 101, while row 4 is filled with syndrome superconducting vertical qubit chips 101. Although only 4 rows are shown for the sake of illustration, it is contemplated that M numerous rows may be included on the quantum bus plane 100, where M is the last row. A code qubit stores quantum information for operation of the quantum processor. A syndrome qubit measures and extracts any errors in the system without corrupting the information present in the code qubit. These terms are commonly applied when discussing "surface code error correction."

According to an embodiment, FIG. 3 is a schematic illustrating the readout plane 102 in an inverted view. FIG. 3 shows the backside of the readout plane 102, and the backside faces the quantum bus plane 100 (not shown in FIG. 3). The readout plane 102 may be made of a semiconductor material as the substrate, such as, e.g., silicon, sapphire, etc. The semiconductor material has fan-out wiring 302 deposited on top of the semiconductor material. The fan-out wiring 302 may be made of a superconducting material.

The readout plane 102 includes etched recesses 301 at locations to insert each of the superconducting vertical qubit chips 101. Each etched recess 301 is a pocket that individually fits a single superconducting vertical qubit chip 101 into a specific location in the readout plane 102, analogous to the etched recesses 201 in the quantum bus plane 100 in FIG. 2.

The etched recesses 301 in the readout plane 102 capacitively connect the superconducting vertical qubit chips 101 to the fan-out wiring 302 via the capacitor pads defined on the upper end of the vertical qubit chip 101 and on the readout plane 102. At the upper end, the vertical qubit chip 101 has coupling capacitor pad 401 as shown in FIG. 4, while the readout plane 102 has a coupling pad 350 in front of each etched recesses 301.

The fan-out wiring 302 has transmission lines 320. Each transmission line 320 individually connects to a single superconducting vertical qubit chip 101 in a one-to-one relationship. The etched recesses 301 serve both a mechanical purpose and an electrical purpose. Mechanically, the etched recesses 301 serve as a slot/pocket to insert each superconducting vertical qubit chip 101. Electrically, the etched recesses 301 align each superconducting vertical

qubit chip **101** to an individual transmission line **320** of the fan-out wiring **302**. The fan-out wiring **302** individually couples to each superconducting vertical qubit chip **101**. Also, the fan-out wiring **302** individually connects each superconducting vertical qubit chip **101** to a flexible circuit board **303**. The fan-out wiring **302** does not affect quantum information on the superconducting vertical qubit chips **101**. The fan-out wiring **302** connects the superconducting vertical qubit chips **101** to the outside environment (e.g., the 50 ohm ( $\Omega$ ) environment). The flexible circuit board **303** individually connects each superconducting vertical qubit chip **101** to an individual connector **304** via the fan-out wiring **302**. Although the flexible circuit board **303** is shown as one implementation, it is contemplated that other type of circuit boards or electrical connections may be utilized.

The connectors **304** individually connect the superconducting vertical qubit chips **101** to external electronics (not shown). The connectors **304** may be microwave connectors in which microwave signals may be input and qubit states can be read. Each connector **304** has a one-to-one relationship to a single superconducting vertical qubit chip **101** on the readout plane **102**, such that each superconducting vertical qubit chip **101** is individually addressable through a single connector **304**, through the flexible circuit board **303**, through the fan-out wiring **302**, a particular transmission line **320**, and through an individual etched recess **301**. In one implementation, the connectors **304** may coaxial cable connectors configured to connect to coaxial cables. Although not shown so as not to obscure FIG. 3, it is understood that conductive wiring runs through the flexible circuit board **303** and that wiring connects the flexible circuit board **303** to each respective connector **304** as understood by one skilled in the art. The conductive wiring of the flexible circuit board **303** may be made of superconducting or normal material.

FIG. 4 is a schematic of an example superconducting vertical qubit chip **101** according to an embodiment. Various details of the superconducting vertical qubit chips **101** are shown in FIG. 4. The superconducting vertical qubit chips **101** may have a substrate made of a semiconductor material, such as, e.g., silicon, sapphire, etc. Each qubit chip **101** is an integrated circuit. Conductive material is deposited and patterned on the substrate of the superconducting vertical qubit chips **101** to form the integrated circuit. The superconducting vertical qubit chips **101** are not a monolithic wafer. Rather, the superconducting vertical qubit chips **101** are formed from a wafer (substrate) diced into individual qubit dies. Each diced superconducting vertical qubit chip **101** includes a coupling capacitor pad **401**. The coupling capacitor pad **401** is a capacitor that capacitively couples each superconducting vertical qubit chip **101** to the readout plane **102** via the fan-out wiring **302**, when the superconducting vertical qubit chip **101** is inserted in its etched recess **201**. Accordingly, on one end of the superconducting vertical qubit chip **101**, that end is electrically connected to the readout plane **102** through the coupling capacitor pad **401** and coupling pad **350** on the readout plane **102**. It is noted that, for coupling capacitor pads **401** and **350** and coupling capacitor pads **404** and **250**, the coupling capacitors may be defined by metal pads that are at right angles to each other, with a well-defined vertical separation. The two types of coupling capacitors are quantum buss plane to lower side of qubit chip, and upper side of vertical qubit chip to readout plane. It should be understood that two metal surfaces (pads in this case) at right angles to each other, separated by some distance, define a capacitor. Embodiments exploit this fact to permit accurate coupling between circuit elements without resorting to wire bonds across right angle connections.

Additionally, each superconducting vertical qubit chip **101** includes coupling capacitor pads **404**. The coupling capacitor pads **404** form a capacitor, and between the two coupling capacitor pads **404** is a tunnel junction **403** (sometimes called the qubit), such as, e.g., a Josephson junction. The coupling capacitor pads **404** form a capacitor that capacitively couples to the quantum bus plane **100** via the interconnecting wiring **202**. Accordingly, on the opposite end to the coupling capacitor pad **401**, the opposite end is electrically connected to the quantum bus plane **100** through the coupling capacitor pads **404**.

The superconducting vertical qubit chip **101** includes readout resonator **402**. The readout resonator **402** is configured with a resonance frequency designed to read the state of the qubit tunnel junction **403**. The readout resonator **402** is positioned between the coupling capacitor pad **401** and the coupling capacitor pads **404**. The readout resonator **402** is formed of conductive material that connects the coupling capacitor pad **401** and the coupling capacitor pads **404**. The conductive material is a superconducting material, which forms the circuit.

The superconducting vertical qubit chip **101** includes a ground plane **405** surrounding the circuit of the coupling capacitor pad **401**, the coupling capacitor pads **404**, and the readout resonator **402**. The material of the substrate separates the ground plane **405** from the circuit.

According to an embodiment, an assembly and packaging technique for the modular array of vertically integrated superconducting qubit chips **101** is discussed below in FIGS. 5A, 5B, 5C, 5D, 5E, and 5F. FIG. 5A illustrates part of an assembly **500**. The assembly **500** has a copper block **502**. The copper block **502** includes a readout plane slot **503**. The readout plane **102** is to be inserted into the readout plane slot **503** as discussed further below. Although a copper block **502** is illustrated, the block **502** may be made of other materials. The block **502** can be constructed of a variety of materials provided they give high thermal conductivity. Examples other than copper include brass, sapphire, silicon, silver, aluminum, and/or niobium.

Assembly combs **520A** and **520B** are utilized to orient alignment of the superconducting vertical qubit chips **101** for assembly with the readout plane **102** (in the etched recesses **201**) and quantum bus plane **100** (in the etched recesses **301**) within the copper block **502**. Both assembly combs **520A** and **520B** have teeth with predefined spacing. For example, the assembly comb **520A** has teeth **525A** and the assembly comb **520B** has teeth **525B**. In one implementation, the spacing of the teeth **525A** is larger than the spacing of the teeth **525B**, and the spacing of the teeth **525A** and **525B** is based on accommodating the cross-section size of the superconducting vertical qubit chips **101**.

The copper block **502** includes assembly slots **501A** and **501B**. The assembly comb **520A** is inserted into the assembly slot **501A**, and the assembly comb **520B** is inserted into the assembly slot **501B**. One assembly slot is positioned higher than the other assembly slot such that the assembly combs **520A** and **520B** define the desired alignment slots where they cross over and under each other but do not interfere with each other when inserted into their respective assembly slots **501A** and **501B**.

FIG. 5B is a schematic of the assembly **500** showing the assembly combs **520A** and **520B** in place within the copper block **502** according to an embodiment. Slots **525** are formed by the intersection of the assembly combs **520A** and **520B** while in the copper block **502**. The slots **525** are utilized to orient the superconducting vertical qubit chip **101**. In particular, the slots **525** are formed by the spacing of

the teeth **525A** and **525B** such that the slots **525** can accommodate the size of the superconducting vertical qubit chips **101**. In one implementation, the spacing of the slots **525** may be about 5 millimeters (mm) in the x-axis and may be about 5 mm in the y-axis. In one implementation, each superconducting vertical qubit chip **101** may have approximate dimensions of 8 mm tall by 2 mm wide by 0.7 mm thick.

Also, to accommodate the size of the superconducting vertical qubit chips **101**, the etched recesses **201** and **301** may be about 0.7 mm in the x-axis and about 2 mm in the y-axis. The etched recessed **201** and **301** may have a depth of about 0.35 mm in the z-axis.

FIG. **5C** is a schematic of the assembly **500** showing an abbreviated view inside the copper block **502** (not shown) which is part of a housing **550** (shown in FIG. **5F**) according to an embodiment. In FIG. **5C**, the abbreviated view omits certain elements in order to simplify the assembly **500** for better understanding. The walls of the housing copper block **502** are removed, and only a copper base **530** of the housing **550** is shown. The quantum bus plane **100** is attached to and/or positioned on the copper base **530**. The intersecting assembly combs **520A** and **520B** are in place (within the copper block **502**) forming the slots **525**. Aligned through the slots **525**, a few example superconducting vertical qubit chips **101** are installed into (the etched recesses **201** in) the quantum bus plane **100**. The slots **525** directly align to individual etched recesses **201** below and provide a guide during installation of the superconducting vertical qubit chips **101**.

FIG. **5D** is a schematic of the assembly **500** showing a transparent view into the copper block **502** according to an embodiment. FIG. **5D** shows the readout plane **102** installed into the copper block **502** and extending outside of the copper block **502** through readout plane housing slot **585**. In one implementation, the quantum bus plane **100** fits into the bottom of the copper block **502**. In another implementation, the copper block **502** may sit on top of the quantum bus plane **100**. The superconducting vertical qubit chips **101** are sandwiched between the readout plane **102** and the quantum bus plane **100**, and the ends of the superconducting vertical qubit chips **101** fit into the etched recesses **201** and **301** of the quantum bus plane **100** and readout plane **102**, respectively. For simplicity and ease of understanding, only a few superconducting vertical qubit chips **101** are shown in FIG. **5D**. Also, so as not to obscure FIG. **5D**, the assembly combs **520A** and **520B** are not shown in this figure.

A board clamp **555** holds and attaches to portion of the readout plane **102** extending outside of the housing. The board clamp **555** holds and attaches the readout plane **102** to the flexible circuit board **303**. Outside of the housing **550**, the connectors **304** are on a rigid circuit board **330** and connected to the flexible circuit board **303**. The circuit board **330** comprises circuits (not shown) individually connecting each connector **304** to an individual circuit within the flexible circuit board **303**, as understood by one skilled in the art.

FIG. **5E** is a schematic of the assembly **500** showing a view underneath the housing **500** according to an embodiment. The copper base **530** of the housing is removed. FIG. **5E** allows the bottom of the quantum bus plane **100** to be viewed.

FIG. **5E** also shows that wire bonds **578** connect the readout plane **102** to the board clamp **555**. These wire bonds **578** create an electrical connection between the fan-out wiring **302** on the readout plane **102** and the conductors (of whatever type) on the flexible circuit board **303**. Although it

possible to mechanically bond the flexible circuit board **303** directly to the silicon readout plane **102**, those two items, however, have extremely different thermal expansion coefficients which may cause the connections to break over time. Wire bonds **578** being flexible permit long-term reliability over many thermal cycles. In one implementation, the two readout planes are to be made of the same material so any dimensional changes from thermal expansion are the same for both planes.

FIG. **5F** is a schematic of the assembly **500** according to an embodiment. FIG. **5F** shows that a pusher block **570** pushes the readout plane **102** firmly against the superconducting vertical qubit chips **101**. The pusher block **570** is spring loaded. The constant pressure of the pusher block **570** ensures that the superconducting vertical qubit chips **101** stay in the etched recesses **201** and **301**. The force of the pusher block **570** is caused by a spring mechanism **575** attached to a top cap **582** of the housing **550**.

As can be seen in FIG. **5F**, the housing **550** is an enclosure. The housing **550** may be made of copper, silver, brass, silicon, sapphire, aluminum, and/or niobium. The housing **550** includes the copper block **502**, the copper base **530**, the pusher block **570**, and the top cap **582**.

In one implementation, the assembly combs **520A** and **520B** may remain in the copper block **502** after the superconducting vertical qubit chips **101** have been installed (i.e., inserted into the etched recesses **201** and **301** of the quantum bus and readout planes **100** and **102**, respectively). In another implementation, the assembly combs **520A** and **520B** may be removed from the copper block **502** after installing the superconducting vertical qubit chips **101**, such that the assembly combs **520A** and **520B** are not in the housing **550**.

For ease of understanding, sub-headings are provided below. The sub-headings are meant for explanation purposes and not limitation.

#### Standardized Fabrication of Elements:

Each of the discussed silicon elements, such as, e.g., the quantum bus plane **100**, superconducting vertical qubit chips **101**, and readout plane **102**, use well-established lithographic technology that is time tested in the superconducting qubit community and thus understood by one skilled in the art. In one embodiment, the materials are standardized to niobium for the resonator and transmission line elements; the materials are aluminum and native aluminum oxide for the qubit junction fabrication (i.e., the qubit tunnel junction **403**) via standard double-angle evaporation. All lithography may be performed on high-resistivity silicon wafers with established loss parameters appropriate for qubit technology, as understood by one skilled in the art.

The readout resonator **402** is in on the vertical qubit chip **101**, and transmission line elements are any other wiring on the quantum buss plane **100**, the qubit chip **101**, and the readout plane **102**. In one implementation, the readout resonators **402** may be of a different material than the wiring. In another implementation, the readout resonators **402** and wiring may be fabricated from a variety of all the same materials. In yet another implementation, the readout resonators **402** and various different portions of the wiring may be fabricated from a variety of different materials for each sub-category of function.

Complete assembly of a scalable quantum processor with N qubits (i.e., N qubit chips **101**) is achieved without resorting to any multi-level lithography, inserted ground planes, cross-overs, or thru-silicon-vias (TSVs). Using current standard lithographic techniques, embodiments allow the straightforward integration of N=100 to 1000 supercon-

11

ducting vertical qubit chips **101**, taking up a space roughly the size of a deck of playing cards (e.g., 2.5×3.5 inches or 64×89 mm).

Design of Individual Qubit Chips and Coupling Capacitance Choices:

From electromagnetic simulations for reasonable parameters of qubit tunnel junctions **403**, readout resonators **402**, and quantum bus planes **100**, it is possible to achieve the desired precise coupling capacitance values with the geometry described herein.

Each individual superconducting vertical qubit chip **101** contains a capacitor (i.e., coupling capacitor **404**) that couples signal to the quantum bus traces (i.e., interconnect wiring **202**) on the quantum bus plane **100**. The capacitor (coupling capacitor **404**) provides coupling that is appropriate for a specific universal two-qubit entangling gate. The capacitor is formed by an electrode on the lower end of the vertical qubit chip **101** which couples to electrodes on the quantum bus plane **100**. The approximate range in this implementation for the capacitor value is around 7 to 5 femto Farads. The interconnection between the superconducting vertical qubit chip **101** and the etched recesses **201** (pocket) in the quantum bus plane **100** is designed to minimize stray coupling between the qubit signals and ground plane **405**.

On the other end of the superconducting vertical qubit chip **101**, the interconnection with the readout plane **102** creates a specific capacitance between the readout resonator **402** and the control transmission line **320** (of the fan-out wiring **302**) such that the readout resonator **402** has a well-defined quality factor and permits a high fidelity readout. This capacitor (i.e., coupling capacitor pad **401**) is formed by an electrode on the superconducting vertical qubit chip **101** (qubit die) which couples to an electrode (a portion of the control transmission line **320**) on the readout plane **102**. The approximate value of this capacitor in this implementation is around 5 to 7 femto Farads, for example.

Each superconducting vertical qubit chip **101** is metalized on the backside with superconductor material to control stray coupling and other electric fields within the processor housing **550**. The backside of the superconducting vertical qubit chip **101** is opposite the circuit of the coupling capacitor pad **401**, the coupling capacitor pads **404**, and the readout resonator **402** on the front side.

Note that all capacitor values and uncertainty are determined by lithographic feature sizes and depth of etches. These values are easily changed and provide for sufficient accuracy for the circuit tolerances required for embodiments.

Design of Quantum Bus Plane:

The fabrication process of the quantum bus plane **100** can begin with standard 2D integration techniques. In one implementation, niobium is electro-sputtered onto a silicon substrate **590**. Multiple masks, having the quantum bus designs and having the etched recesses **201** (pockets) where qubit chips **101** are to be mounted, may be used for reactive ion etching (RIE) of the niobium. The quantum bus design mask defines the coupling bus resonators **205** which couple quantum information among the superconducting vertical qubit chips **101**. The pocket mask (for making the etched recesses **201**) defines the locations to etch down into the silicon for the individual superconducting vertical qubit chips **101** to be mounted. The process for the pocket mask etch may be similar to most 3D integration schemes, except in this case the sputtered niobium is used as a hardmask to first define the pockets (i.e., etched recesses **201**). Definition of the pocket (i.e., etched recess **201**) in the silicon substrate **590**

12

can be achieved using a deep silicon dry etch process, reactive ion etching (RIE), or a wet chemistry (tetramethyl ammonium hydroxide (TMAH)).

The pockets (i.e., etched recesses **201**) of the quantum bus plane **100** are arranged in a grid structure where successive rows are offset, one corresponding to superconducting vertical code qubit chips, and the other row corresponding to superconducting vertical syndrome qubits chips **101** for error detection via measurement. Each qubit chip pocket (i.e., etched recess **201**) is arranged to couple to two coupling bus resonators **205** defined on the quantum bus plane **100** in one implementation. Note that this arrangement is not the only way to realize the surface code, as one can also couple either three or four coupling bus resonators **205** to a single superconducting vertical qubit chip **101** in another implementation. Location accuracy of the qubit chip pockets (etched recesses **201** (including etched recesses **301** in readout plane **102**) is determined by the lithography and depth accuracy as determined by the etch time. The pockets are formed with a chamfered or bell-mouthed opening to allow easy insertion of each superconducting vertical qubit chip **101** (qubit die).

Depending on results from scaling to larger N (i.e., a larger amount of superconducting vertical qubit chips **101**), the quantum bus plane **100** may be admissible to more integration techniques such as TSVs for chip-mode reduction. The nuance here is that no Josephson junctions (qubits) **403** need to be defined in this quantum bus plane **100**, so there would be minimal effect on qubit coherence with further integration of the quantum bus plane **100**.

Design of Readout Plane:

The readout plane **102** starts off similar to the quantum bus plane **100**, with niobium conductors etched lithographically on a silicon substrate **595**. Co-planar transmission lines **320** are patterned on the readout plane **102** in a fan-out configuration (i.e., fan-out wiring **302**) so as to bring external signals into and out of each superconducting vertical qubit chip **101**. These transmission lines **320** are defined in a coplanar waveguide, and support 50Ω microwave driving of both readout and qubit control signals.

All these transmission lines **320** meander through the readout plane **102** terminating on one edge in wire bond pads **370**. The wire bond pads **370** are on the extreme right end of the fan-out wiring **302**. Similar to the quantum bus plane, pockets (i.e., etched recesses **301**) in the readout plane **102** are likewise defined via deep etching into the silicon substrate **595** of the readout plane **102**, in corresponding locations as the etched recesses **201** in the quantum bus plane **100** so as to accept the mounting of the individual superconducting vertical qubit chips **101**. These pockets (i.e., etched recesses **301**) may be chamfered or otherwise bell-mouthed for ease of assembly and locating of structure.

The microwave signals for control and readout are carried off the readout plane **102** via wire bonds **578** to the flexible circuit board **303** which conducts to other transmission lines embedded in a separate rigid circuit board **330** populated with connectors **304** leading to external components.

Ground Planes in Quantum Bus Plane and Readout Plane Pockets:

After etching qubit chip pockets (etched recesses **201**, **301**) in both the quantum bus and readout planes **100** and **102** respectively, these pockets (etched recesses **201**, **301**) are coated with niobium via sputtering to form continuous ground plane. These ground planes are designed to mate to the ground planes **405** that exist on the extreme ends of each superconducting vertical qubit chip **101** to form a continuous electrostatic ground between the quantum bus and

13

readout planes **100** and **102**, respectively; the continuous electrostatic ground between the quantum bus and readout planes **100** and **102** (respectively) serves to (1) further isolate each qubit site (i.e., locations of etched recesses **201**, **301**) from spurious modes, (2) isolate each qubit site (i.e., locations of etched recesses **201**, **301**) from adjacent qubit superconducting vertical qubit chips **101**, and (3) eliminate unwanted cross-talk coupling between superconducting vertical qubit chips **101**.

Assembly of Modular Array Elements:

1. Each individual superconducting vertical qubit chip **101** is located by an etched recess **201** formed in the quantum bus plane **100** and an etched recess **301** formed in the readout plane **102**. In one implementation, the etched recesses **201**, **301** are accurately formed in the silicon substrates **590**, **595** using a standard wet etch process.

2. Each individual superconducting vertical qubit chip **101** is chosen for desirable electrical characteristics such as transition frequency. In some cases the syndrome qubits might be more strongly coupled to the readout wiring to enhance signal-to-noise. This would reduce coherence times on the syndrome qubits which does not in any way degrade the quantum information in the code qubits.

3. A pair of crossed assembly combs **520A** and **520B** is mounted to the outer housing of the copper block **502** in order to temporarily provide alignment for the superconducting vertical qubit chips **101** (as shown in FIG. 5A). The assembly combs **520A** and **520B** create a series of alignment slots **525** (as shown in FIG. 5B) to orient the superconducting vertical qubit chips **101** which are inserted vertically from above. The superconducting vertical qubit chips **101** key into the etched recesses **201** in the quantum bus plane **100** (as shown in FIG. 5C) and are thereby (automatically) oriented to key into the corresponding etched recesses **301** in the readout plane **102** (as shown in FIG. 5D). The readout plane **102** is inserted from the side via readout plane slot **503**. FIG. 5E depicts the assembly **500** from below and shows the assembled components with the assembly combs **520A** and **520B** omitted. Once assembled, the vertical organization of the superconducting vertical qubit chips **101** constrained (and sandwiched) between the two silicon quantum bus and readout planes **100** and **102** (respectively) is maintained with pressure applied by the pusher block **570**. The pusher block **570** is spring-loaded from above via the springs **575** pressed down by the top cap **582** (as shown in FIG. 5F).

Expandable, Scalable and Replaceable Array:

The figures associated with embodiments show a fourteen qubit chip array but the number of superconducting vertical qubit chips **101** can be expanded to any arbitrary number (N). All that is required is that the quantum bus plane **100** should be enlarged and the niobium wiring be replicated at all qubit sites (i.e., locations at the etched recesses **201** to accommodate superconducting vertical qubit chips **101**) as needed. The readout plane **102** can support many signal transmission lines **320** interleaved between each qubit site (i.e., locations at the etched recesses **301** to accommodate superconducting vertical qubit chips **101**) to bring the signals to one edge and may require integration of dielectric cross-overs to reduce crosstalk if desired. Moreover, the further integration of the readout plane **102** and quantum bus planes **100** is a minimal issue as it will neither directly affect the qubit chip fabrication process nor the qubit coherence performance.

According to embodiments, the assembly **500** includes the desirable feature that each superconducting vertical qubit chip **101** may be hand-selected for the correct electrical

14

characteristics; any member of the array of superconducting vertical qubit chips **101** may be individually replaced at any time if the qubit chip's performance degrades for any reason during operation. Replacement of the superconducting vertical qubit chip **101** can be accomplished without removing wire bonds **578** and/or without having to unsolder any components.

Embodiments provide a clear separation of fabrication processing steps and avoid the need for all N qubit and circuit parameters to meet specification on a single superconducting vertical qubit chip **101**. Qubit chips **101** from multiple different fabrication runs can be combined in this type of quantum processor so that parameters such as transition frequency may be easily tailored without having to achieve a full range of accurate parameters on one silicon wafer in just one fabrication run. Individual qubit chips **101** may be chosen from various different fabrication runs (wafers) and combined in the processor assembly.

As understood by one skilled in the art, microwave signals are applied to the qubit chip **101** via the readout lines to excite it into a defined state. After some later time the state of the qubits can be then read out by interrogating them at some other microwave frequency, again via the readout lines.

FIG. 6 is a method **600** of configuring an assembly **500** for a quantum computing device according to an embodiment. Reference can be made to the figures discussed herein.

At block **605**, the quantum bus plane **100** having a first set of recesses **201** are provided, as depicted in FIG. 2.

At block **610**, the quantum bus plane **100** is positioned in the block **502**, on top of the copper base **530**, as seen in FIG. 5D. The alignment combs **520A** and **520B** are installed in the copper block **502** and fixed in place, creating a series of precisely aligned slots **535** to accept the qubit chips **101**, as seen in FIG. 5B.

At block **615**, a plurality of superconducting vertical qubit chips **101** are placed/installed in the block **502**, each of the plurality of qubit chips **101** has a first end positioned in the first set of recesses **201** (as shown in FIG. 5C). The plurality of qubit chips **101** extend vertically in a lengthwise direction by being positioned in the first set of recesses **201** and in the slots **525** created by the alignment combs. The set of recesses **201** holds the lower end of the plurality of qubit chips **101** in the quantum bus plane **100**. The first end of the plurality of qubit chips **101** is opposite the second end.

At block **620**, the readout plane **102** with its recesses **301** is then installed into the copper block **502** such that the recesses **301** in the readout plane **102** are positioned to accept the upper end (i.e., second end) of the plurality of all the qubit chips **101** which have been aligned by the slots **525** created by both alignment combs **520A**, **520B**. The readout plane **102** thus drops down over the ends of the qubit dies **101** a distance equal to the depth of the recesses in the readout plane **301** and the precise mechanical alignment of all the electrical circuit elements is achieved in all three axes simultaneously. At this point the alignment combs **520A** and **520B** may either be left in place or may be removed.

The quantum bus plane **100** comprises a substrate **590** with interconnect wiring **202** on top of the substrate **590**, and the interconnect wiring **202** connects the plurality of qubit chips **101** via a plurality of coupling bus resonators **205**. The readout plane **102** comprises a substrate **595** with fan-out wiring **302** on top of the substrate **595**, and the fan-out wiring **302** individually connects each of the plurality of qubit chips **101** to a circuit board **330**. The circuit board **330** individually connects each of the plurality of qubit chips **101** to a plurality of connectors **304** in a one-to-one relationship.

15

The block **502** is configured to receive a first assembly comb **520A** and a second assembly comb **520B** to form an intersection, and the intersection of the first and second assembly combs **520A**, **520B** form a plurality of slots **525** for individually accepting the plurality of qubit chips **101**. The plurality of slots **525** mechanically holds the plurality of qubit chips **101** in a vertical position.

FIG. 7 is a method **700** of configuring an assembly **500** for a quantum computing device according to an embodiment. Reference can be made to the figures discussed herein.

At block **705**, the following parts are assembled: copper base **530** and copper block **502**.

At block **710** the quantum buss plane **100** is installed into the copper block **502** such that the quantum buss plane **100** rests on top of the copper base **530**, and the quantum bus plane **100** has a set of recesses **201** (the readout plane **102** has a different set of recesses **301**). Then, the assembly combs **520A** and **520B** are installed and fixed into the copper block **502** thereby creating alignment slots **525**.

At block **715**, a plurality of qubit chips **101** are installed in the block **502**, where each of the plurality of qubit chips **101** has a first end positioned in the first set of recesses **201** using the alignment slots **525** created by the assembly combs **520A**, **520B** to guide the qubit chips **101** into the correct locations. The housing **550** includes a readout plane housing slot **585**. At block **720**, the readout plane **102** is installed into the slot **585** and the recesses **301** in the readout plane **102** accept the upper ends (i.e., second end) of the plurality of all the qubit chips **101** which have been put in the correct locations by the alignment combs **520A**, **520B** such that the readout plane **102** drops over all of them (qubit chips **101**) simultaneously. The bell-mouthed nature of the recesses **301** in the readout plane **102** assists in the final locating of the ends of the qubit dies **101** into the recesses **301**. The readout plane **102** extends through the readout plane housing slot **585** to connect to the circuit board **330**, and the circuit board **330** connects to a plurality of connectors **304**.

The housing **550** includes a pushing mechanism configured to apply pressure to the readout plane **102**, and the pressure applied to the readout plane **102** forces the plurality of qubit chips **101** to the quantum bus plane **100**. The pushing mechanism comprises: a pusher block **570** positioned on top of the readout plane **102**, and a spring mechanism **575** pressing downward against the pusher block **570**. The top part (top cap **582**) of the housing **550** applying a compression force to the spring mechanism **575** from above.

It will be noted that various microelectronic device fabrication methods may be utilized to fabricate the components/elements discussed herein as understood by one skilled in the art. In semiconductor device fabrication, the various processing steps fall into four general categories: deposition, removal, patterning, and modification of electrical properties.

Deposition is any process that grows, coats, or otherwise transfers a material onto the wafer. Available technologies include physical vapor deposition (PVD), chemical vapor deposition (CVD), electrochemical deposition (ECD), molecular beam epitaxy (MBE) and more recently, atomic layer deposition (ALD) among others.

Removal is any process that removes material from the wafer: examples include etch processes (either wet or dry), and chemical-mechanical planarization (CMP), etc.

Patterning is the shaping or altering of deposited materials, and is generally referred to as lithography. For example, in conventional lithography, the wafer is coated with a chemical called a photoresist; then, a machine called a

16

stepper focuses, aligns, and moves a mask, exposing select portions of the wafer below to short wavelength light; the exposed regions are washed away by a developer solution. After etching or other processing, the remaining photoresist is removed. Patterning also includes electron-beam lithography.

Modification of electrical properties may include doping, such as doping transistor sources and drains, generally by diffusion and/or by ion implantation. These doping processes are followed by furnace annealing or by rapid thermal annealing (RTA). Annealing serves to activate the implanted dopants.

The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods, and computer program products according to various embodiments of the present invention. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of instructions, which comprises one or more executable instructions for implementing the specified logical function(s). In some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts or carry out combinations of special purpose hardware and computer instructions.

What is claimed is:

1. A method of configuring an assembly for a quantum computing device, the method comprising:

providing a quantum bus plane having a first set of recesses and a readout plane having a second set of recesses;

positioning the readout plane opposite the quantum bus plane in a block, such that the first set of recesses opposes the second set of recesses; and

installing a plurality of qubit chips in the block, each of the plurality of qubit chips having a first end positioned in the first set of recesses and having a second end positioned in the second set of recesses.

2. The method of claim 1, wherein the plurality of qubit chips extend vertically in a lengthwise direction by being positioned in both the first set of recesses and the second set of recesses.

3. The method of claim 1, wherein the first set of recesses holds the first end of the plurality of qubit chips in the readout plane; and

wherein the second set of recesses holds the second end of the plurality of qubit chips in the quantum bus plane; and

wherein the first end of the plurality of qubit chips is opposite the second end.

4. The method of claim 1, wherein the quantum bus plane comprises a substrate with interconnect wiring on top of the substrate, the interconnect wiring connecting the plurality of qubit chips via a plurality of coupling bus resonators.

5. The method of claim 1, wherein the readout plane comprises a substrate with fan-out wiring on top of the substrate, the fan-out wiring individually connecting each of the plurality of qubit chips to a circuit board; and

17

wherein the circuit board individually connects each of the plurality of qubit chips to a plurality of connectors in a one-to-one relationship.

6. The method of claim 1, wherein the block is configured to receive a first assembly comb and a second assembly comb to form an intersection, the intersection of the first and second assembly combs forming a plurality of slots for individually accepting the plurality of qubit chips; and wherein the plurality of slots mechanically hold the plurality of qubit chips in a vertical position.

7. A method of configuring an assembly for a quantum computing device, the method comprising:

providing a housing configured as an enclosure having a bottom part, a top part, and a block, the block connecting the top and bottom parts;

providing a readout plane having a first set of recesses and a quantum bus plane having a second set of recesses; assembling the readout plane opposite the quantum bus plane in a block, such that the first set of recesses opposes the second set of recesses; and

installing a plurality of qubit chips in the block, each of the plurality of qubit chips having a first end positioned

18

in the first set of recesses and having a second end positioned in the second set of recesses.

8. The method of claim 7, wherein the housing includes a readout plane housing slot through which the readout plane extends; and

wherein the readout plane extends through the readout plane housing slot to connect to a circuit board, the circuit board connecting to a plurality of connectors.

9. The method of claim 7, wherein the housing includes a pushing mechanism configured to apply pressure to the readout plane, the pressure applied to the readout plane forces the plurality of qubit chips to the quantum bus plane.

10. The method of claim 9, wherein the pushing mechanism comprises:

a pusher block positioned on top of the readout plane, and a spring mechanism pressing downward against the pusher block, the top part of the housing applying a compression force to the spring mechanism from above.

\* \* \* \* \*